


784G/G3/G5 SS (Stainless Steel) Lites

For 1 3/4" Door, & 3/16", 1/4", or 5/16" Glass



Installation Instructions

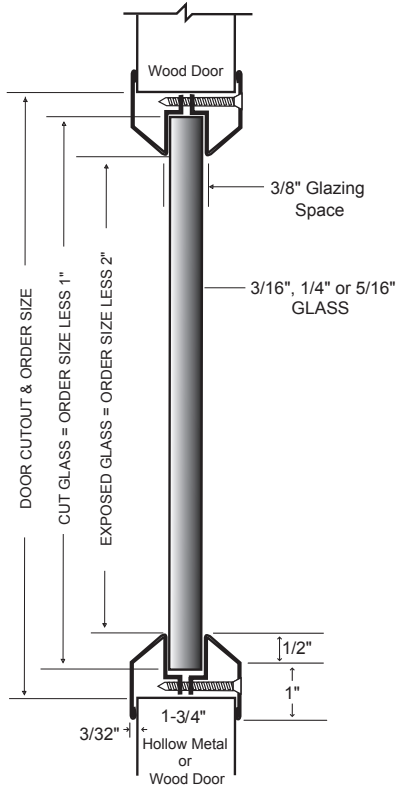

Installation Instructions

1. Cut out door in accordance with door manufacturer's listing procedure. Steel fire-rated doors do NOT require an opening reinforcing channel or reinforcing clips.
2. Install glass & glazing material (sold separately), into lite kit.
3. Position outer frame in-door cut-out.
4. Position inner frame and insert start all screws before fully tightening.
5. Tighten screws using a crisscross pattern. Use caution when using power screw-driving equipment to avoid stripping the material.

Customer Service

1-877-671-7011

us.allegion.com



© Allegion 2016
111369 Rev. 9/16-a